## SilverBowlOpen 2023



Oil Pattern Distance: 47 Feet
Forward Oil Total: 11,385 mL
Forward Boards Crossed: 253 Boards

Reverse Brush Drop: 38 Feet
Reverse Oil Total: 11,52 mL
Reverse Boards Crossed: 256 Boards

Oil Per Board: 45 uL
Volume Oil Total: 22,905 mL
Total Boards Crossed: 509 Boards


2 3L 5R 1 10 33 1.4 2.8 1.4 1485 3 5L 7R 1 14 29 2.8 4.7 1.9 1305 4 9L 9R 1 14 23 4.7 6.6 1.9 1035 5 11L 11R 2 18 38 6.6 11.7 5.1 1710 6 13L 13R 2 22 30 11.7 17.9 6.2 1350 7 14L 14R 2 22 26 17.9 24.1 6.2 1170 8 2L 2R 0 26 0 24.1 37.0 12.9 0	4	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil		
3     5L     7R     1     14     29     2.8     4.7     1.9     1305       4     9L     9R     1     14     23     4.7     6.6     1.9     1035       5     11L     11R     2     18     38     6.6     11.7     5.1     1710       6     13L     13R     2     22     30     11.7     17.9     6.2     1350       7     14L     14R     2     22     26     17.9     24.1     6.2     1170       8     2L     2R     0     26     0     24.1     37.0     12.9     0	1 2L 2R 2 10 74 0.0 1.4 1.4 3330											
4     9L     9R     1     14     23     4.7     6.6     1.9     1035       5     11L     11R     2     18     38     6.6     11.7     5.1     1710       6     13L     13R     2     22     30     11.7     17.9     6.2     1350       7     14L     14R     2     22     26     17.9     24.1     6.2     1170       8     2L     2R     0     26     0     24.1     37.0     12.9     0	_											
5     11L     11R     2     18     38     6.6     11.7     5.1     1710       6     13L     13R     2     22     30     11.7     17.9     6.2     1350       7     14L     14R     2     22     26     17.9     24.1     6.2     1170       8     2L     2R     0     26     0     24.1     37.0     12.9     0	3 5L 7R 1 14 29 2.8 4.7 1.9 1305											
6 13L 13R 2 22 30 11.7 17.9 6.2 1350 7 14L 14R 2 22 26 17.9 24.1 6.2 1170 8 2L 2R 0 26 0 24.1 37.0 12.9 0	4	9L	9R	1	14	23	4.7	6.6	1.9	1035		
7 14L 14R 2 22 26 17.9 24.1 6.2 1170 8 2L 2R 0 26 0 24.1 37.0 12.9 0	5	11L	11R	2	18	38	6.6	11.7	5.1	1710		
8 2L 2R 0 26 0 24.1 37.0 12.9 0												
	7	14L	14R	2	22	26	17.9	24.1	6.2	1170		
9 2L 2R 0 30 0 37.0 47.0 10.0 0	8 2L 2R 0 26 0 24.1 37.0 12.9 0											
	9 2L 2R 0 30 0 37.0 47.0 10.0 0											

Conditioner: Type In or Sele One
TransferType: Type In or Sele One
Forward

Reverse

Combined

Buff

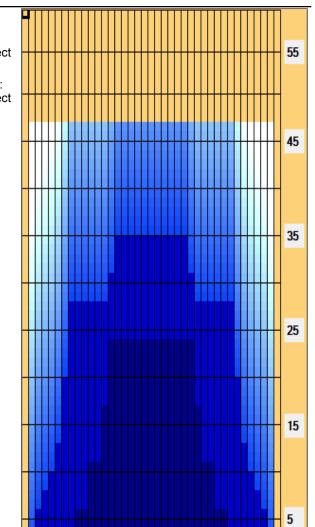

4	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	47.0	35.0	-12.0	0
2	15L	15R	1	26	11	35.0	31.4	-3.6	495
3	14L	14R	1	26	13	31.4	27.8	-3.6	585
4	8L	8R	2	26	50	27.8	20.5	-7.3	2250
5	7L	7R	2	26	54	20.5	13.2	-7.3	2430
6	6L	6R	1	22	29	13.2	10.1	-3.1	1305
7	5L	5R	1	14	31	10.1	8.2	-1.9	1395
8	4L	4R	1	14	33	8.2	6.3	-1.9	1485
9	3L	3R	1	10	35	6.3	4.9	-1.4	1575
10	2L	2R	0	10	0	4.9	0.0	-4.9	0

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	MIddle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	3,09	1,54	1,05	1,05	1,54	3,5

